

25 March 2009

Interoperability Experiences with the OGSA® WSRF Basic Profile 1.0

Status of This Document

This document provides information to the Grid community regarding the experiences of the authors in implementing the OGSA® WSRF Basic Profile 1.0. Distribution is unlimited.

Copyright Notice

Copyright © Open Grid Forum 2008-2009. All Rights Reserved.

Trademark

OGSA is a registered trademark and service mark of the Open Grid Forum.

Abstract

This document describes the experiences of interoperability testing of independent implementations of the OGSA WSRF Basic Profile 1.0 [**OGSA-WSRFBP**], and the specifications that it incorporates by reference, namely Web Services Addressing 1.0 - Core [**WS-Addressing**], Web Services Resource Properties 1.2 [**WS-ResourceProperties**], Web Services Resource Lifetime 1.2 [**WS-Resource Lifetime**], Web Service Base Faults 1.2 [**WS-Base Faults**], and Web Services Base Notification 1.3 [**WS-BaseNotification**].

Many problems were encountered during the tests, largely related to schema errors, platform/tooling incapability, and specification issues. Despite this the tests proved in so much as they identified two issues in the OGSA WSRF Basic Profile and the WS-BaseNotification specifications. Solutions were proposed and were agreed by all implementers and original Profile authors.

Contents

Abstract	1
1. Introduction	3
2. Participants information	3
3. OGSA WSRF Basic Profile 1.0 Interoperability Tests.....	3
3.1 Get ResourcePropertyNames using specified operations:.....	4
3.2 Get FinalWSResourceInterface using specified operations:	4
3.3 Get WSResourceInterfaces using specified operations:	4
3.4 Get ResourceEndpointReference using specified operations:.....	5
3.5 Destroy the service using ResourceLifetime Destroy operation	5
3.6 Terminate the service using ResourceLifetime SetTerminationTime operation.....	5
3.7 BaseFault	5
3.8 Subscribe.....	5
4. Issues.....	6
4.1 Schema error.....	6
4.2 Platform/tooling inadequacies	6
4.3 Specification issues	6
4.3.1 <i>ISSUE 1Elements of the Profile are inconsistent to a typical WSRF style</i>	6
4.3.2 <i>ISSUE 2 The ambiguous rendering in the complexType TopicExpressionType Simple dialect.</i>	8
5. Security Considerations	9
6. Author Information	9
7. Contributors	9
8. Intellectual Property Statement	9
9. Disclaimer	9
10. Full Copyright Notice	9
11. References	10
Appendix A Interoperability Testing Specification.....	11
A.1. Scope.....	11
A.2. Terminology.....	11
A.3. Namespaces	12
Appendix B Ticker Factory Service	13
Appendix C Ticker Service	15
C. 1 . Ticker service resource properties	15
C. 2 . Ticker service interoperability operations.....	16
Appendix D WSRF Basic Profile interoperability test scenarios	17
D. 1 . Scenario A: Initial Creation of a ticker service instance	17
D. 2 . Scenario B: OGSA Resource Properties Tests	17
D. 2 . 1 . Test 1: ResourcePropertyNames	17
D. 2 . 2 . Test 2: FinalWSResourceInterface	20
D. 2 . 3 . Test 3: WSResourceInterfaces	22
D. 2 . 4 . Test 4: ResourceEndpointReference	24
D. 3 . Scenario C: Resource Lifetime Operations and Base Fault	27
D. 3 . 1 . Test 5: Immediate Resource Termination and Base Fault	27
D. 3 . 2 . Test 6: Scheduled Resource Termination and Base Fault.....	28
D. 4 . Scenario D: Base Notification	29
D. 4 . 1 . Test 8: Subscribe	29
D. 4 . 2 . Scenario D2: Notify	31
Appendix E Normative Factory Service Schema.....	33
Appendix F Normative Factory Service WSDL.....	35
Appendix G Normative Ticker Service Schema	38
Appendix H Normative Ticker Service WSDL	40

1. Introduction

This document describes the experiences gained during the interoperability tests on different implementations of the OGSA WSRF Basic Profile 1.0 (hereafter “the Profile”). The tests cover all the mandatory elements from the Profile, and its reference specifications, including WS-Addressing, WS-ResourceProperties, WS-ResourceLifetime, WS-BaseFaults, and WS-BaseNotification. To avoid unnecessary errors that might be caused by using different schemas, a full set of valid schema and WSDL is defined as appendixes of this document.

Four organizations participated the tests and the event started with each participant publishing their endpoints on the ogsa-bp interop wiki page.¹ Participants then paired up their clients against other services and communicated/investigated problems via email and phone conversations.

2. Participants information

Details for each participant are listed below, along with descriptions of their implementation platforms, software names, and endpoints.

Organizations/ Software	Platform /tools	Endpoints
University of Virginia Global Bio Grid Group (Genesis II)	Axis 1.4, Java	http://sulla.cs.virginia.edu:19090/axis/services http://sulla.cs.virginia.edu:19090/axis/services/TickerFactory
Forschungszentrum Juelich (UNICORE)	XFire, XMLBeans, Java	http://zam461.zam.kfa-juelich.de:9126/services/TickerService http://zam461.zam.kfa-juelich.de:9126/services/TickerFactoryService http://zam461.zam.kfa-juelich.de:9126/services/SubscriptionManagerService
Fujitsu Labs of Europe (USMT)	JAXWS, JAXB, Java	http://193.122.18.162:8080/ogsabp-interop/ticker-factory http://193.122.18.162:8080/ogsabp-interop/ticker http://193.122.18.162:8080/ogsabp-interop/subscription
Argonne National Laboratory (Globus)	Axis 1.4 (With Custom Modifications) Java	http://128.135.125.21:50111/wsrf/services/interop/TickerFactoryService http://128.135.125.21:50111/wsrf/services/interop/TickerService http://128.135.125.21:50111/wsrf/services/interop/Subscription

3. OGSA WSRF Basic Profile 1.0 Interoperability Tests

The tests were carried out with clients and services implementing the OGSA WSRF Basic Profile 1.0 as well as the referenced specifications. The specifications and operations tested follow:

- WS-Addressing
- WS-Resource Properties
 - From the Profile
 - ResourcePropertyNames
 - FinalWSResourceInterface
 - WSResourceInterfaces
 - ResourceEndpointReference
 - From Resource Lifetime
 - CurrentTime
 - TerminationTime

¹ <https://forge.gridforum.org/sf/wiki/do/viewPage/projects.ogsa-wg/wiki/OGSAWSRFBP1.0Tests>

- WS-Resource Properties Operations
 - GetResourceProperty
 - GetMultipleResourceProperties
 - QueryResourceProperties
- WS-Resource Lifetime
 - Destroy
 - SetTerminationTime
- WS-Notification
 - Subscription
 - Resource Property Change Notification
 - Notify
- WS-Base Fault

The scenarios are designed based on a Ticker service, which ticks at a designated interval.

This simple service provides all the necessary content for testing, including WSRF resource properties, operations, lifetime, and notification. The creation of a ticker service object is done via a stateless TickerFactory service on request.

Eight scenarios were designed for this interoperability test and the details and results are shown in tables below.

3.1 Get ResourcePropertyName using specified operations:

1. GetResourceProperty
2. GetMultipleResourceProperties
3. QueryResourceProperties using XPath queries

Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	1,2,-	1,2,-	-	1,2,-
UNICORE	1,2,-	1,2,3	-	1,2,-
Globus (Java)	-	-	-	-
USMT	1,2,-	1,2,-	-	1,2,-

3.2 Get FinalWSResourceInterface using specified operations:

1. GetResourceProperty
2. GetMultipleResourceProperties
3. QueryResourceProperties using XPath queries

Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	1,2,-	1,2,-	-	1,2,-
UNICORE	1,2,-	1,2,3	-	1,2,-
Globus (Java)	-	-	-	-
USMT	1,2,-	1,2,-	-	1,2,-

3.3 Get WSResourceInterfaces using specified operations:

1. GetResourceProperty
2. GetMultipleResourceProperties
3. QueryResourceProperties using XPath queries

Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	1,2,-	1,2,-	-	1,2,-
UNICORE	1,2,-	1,2,3	-	1,2,-
Globus (Java)	-	-	-	-
USMT	1,2,-	1,2,-	-	1,2,-

3.4 Get ResourceEndpointReference using specified operations:

1. GetResourceProperty
2. GetMultipleResourceProperties
3. QueryResourceProperties using XPath queries

Service Client \ Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	1,2,-	1,2,-	-	1,2,-
UNICORE	1,2,-	1,2,3	-	1,2,-
Globus (Java)	-	-	-	-
USMT	1,2,-	1,2,-	-	1,2,-

3.5 Destroy the service using ResourceLifetime Destroy operation

Service Client \ Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	Done	Done	Done	Done
UNICORE	Done	Done	Done	Done
Globus (Java)	Done	Done	Done	Done
USMT	Done	Done	Done	Done

3.6 Terminate the service using ResourceLifetime SetTerminationTime operation

1. Duration
2. Absolute Time

Service Client \ Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	1,2	1,2	-	1,2
UNICORE	1,2	1,2	-2	1,2
Globus (Java)	1,2	1,2	-2	1,2
USMT	1,2	1,2	-2	1,2

3.7 BaseFault

Service Client \ Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	Done	Done	Done	Done
UNICORE	Done	Done	Done	Done
Globus (Java)	Done	Done	Done	Done
USMT	Done	Done	Done	Done

3.8 Subscribe

1. Using Simple QName filter
2. Using XPath filter

Service Client \ Service Client	Genesis II	UNICORE	Globus (Java)	USMT
Genesis II	-	-	-	-
UNICORE	-	1,-	1,-	1,-
Globus (Java)	-	1,-	1,-	1,-
USMT	-	1,-	1,-	1,-

4. Issues

Most of the service implementations have successfully interoperated with the others, despite the fact that some of the specifications or operations were not implemented by various endpoints, for example, QueryResourceProperties operation using XPath query.

Many issues were encountered during this interoperability test event. They are categorized into three types:

- schema error
- platform/tooling incapability
- specification issues

4.1 Schema error

This was the most common cause of an inability to interoperate during the tests and refers to developers having used different schemas or WSDLs than the one that was agreed to appendixes of this document. It also occurred when an older version of the namespaces were implemented and not updated for the interop tests.

The solution most often was to use the schema designated for the interop. And as advice to all future interop-fest participants, before you start any implementation, double check the schema and WSDL and make sure they are the correct ones as this will reduce simple, trivial interop issues.

4.2 Platform/tooling inadequacies

Many Web services development platforms exist with various kinds of available tooling, and they all have different characteristics and strength. However, a major side effect of this is that they tend to cause serialization and deserialization problems with generated data types.

Other problems exist concerning faults. For example, the ResourceUnknownFault is still unresolved due to an xfire tooling problem in the UNCORE implementation. Specifically, inheriting the BaseFault type from SOAPFault does not seem to work in the XFire SOAP engine. It is possible to resolve this, but only by changing certain parts of the XFire SOAP engine source code.

4.3 Specification issues

Two issues were identified during the test.

4.3.1 ISSUE 1Elements of the Profile are inconsistent to a typical WSRF style

University of Virginia identified this issue. The OGSA WSRF BP1.0 specification (see GFD-R-P.072), mandates the use of the four resource property elements listed below:

- ResourcePropertyNames
- FinalWSResourceInterface
- WSResourceInterfaces
- ResourceEndpointReference

The ResourcePropertyNames and WSResourceInterfaces are defined as a list of all resource property element QNames and a list of all known portTypes respectively. In the OGSA-BP schema <http://schemas.ogf.org/ogsa/2006/05/wsrf-bp>, these two elements are of QNameListType. An example of these properties may be:

```
<ogsa:ResourcePropertyNames>
    wsrf-rl:CurrentTime
    ogsa:ResourceEndpointReference
    ticker:Ticker
    ogsa:FinalWSResourceInterface
    wsrf-rl:TerminationTime
    ogsa:WSResourceInterfaces
    ogsa:ResourcePropertyNames
</ogsa:ResourcePropertyNames>
```

However, a more consistent (with respect to WSRF) rendering would be:

```
<ogsa:ResourcePropertyName>
    wsrf-rl:CurrentTime
</ogsa:ResourcePropertyName>
<ogsa:ResourcePropertyName>
    ogsa:ResourceEndpointReference
</ogsa:ResourcePropertyName>
<ogsa:ResourcePropertyName>
    ticker:Ticker
</ogsa:ResourcePropertyName>
<ogsa:ResourcePropertyName>
    ogsa:FinalWSResourceInterface
</ogsa:ResourcePropertyName>
<ogsa:ResourcePropertyName>
    wsrf-rl:TerminationTime
</ogsa:ResourcePropertyName>
<ogsa:ResourcePropertyName>
    ogsa:WSResourceInterfaces
</ogsa:ResourcePropertyName>
<ogsa:ResourcePropertyName>
    ogsa:ResourcePropertyNames
</ogsa:ResourcePropertyName>
```

Proposed solution

Element <ResourcePropertyName>

Remove plural on this element, so on page 19 of the Profile Appendix C.1 the title becomes:
ResourcePropertyName Resource Property Element Definition
 And the general form will be:

```
<ogsa-bp:ResourcePropertyName>
    xsd:QName
</ogsa-bp:ResourcePropertyName>
```

And the cardinality becomes:

```
<xsd:element ref="ogsa-bp:ResourcePropertyName"
    minOccurs="1" maxOccurs="unbounded" />
```

The element definition in the schema document will be:

```
<xsd:element name="ResourcePropertyName" type="xsd:QName" />
```

Element <WSResourceInterfaces>

Remove plural on this element, so on page 19 of the Profile Appendix C.3, the title becomes:
WSResourceInterface Resource Property Element Definition
 And the general form will be:

```
<ogsa-bp:WSResourceInterface>  
  xsd:QName  
</ogsa-bp:WSResourceInterface>
```

Its cardinality becomes:

```
<xsd:element ref="ogsa-bp:WSResourceInterface"  
  minOccurs="0" maxOccurs="unbounded" />
```

The element definition in the schema document will be:

```
<xsd:element name="WSResourceInterface" type="xsd:QName" />
```

4.3.2 ISSUE 2 The ambiguous rendering in the complexType TopicExpressionType Simple dialect

Fujitsu Labs of Europe identified this issue. The WS-Notification and WS-Topics specifications do not contain any clear normative text mandating the exact serialization of topic QName when using the Simple dialect, e.g., no "MUST" etc. in the context. However, they indicate in the XML Schema that the authors of the specification may have had an element-based rendering in mind. The specification contains an XML type definition for the Simple dialect. It does not, however, contain an XML element definition to use for the Simple dialect.

Proposed solution

Mandate the use of the WS-BaseNotification dialect URI and the SimpleTopicExpression XML type defined in WS-Topics, but in the mean time, to introduce an OGSA BP specific XML element of the BaseNotification data type.

An example may look like this:

```
<xsd:element name="Topic" type="wstop:SimpleTopicExpression" />
```

This way, implementers will have to tool up only one new XML element, and some application logic to extract the topic QName, which should be trivial regardless the tooling platform.

5. Security Considerations

To avoid complications, the design of the interoperability testing scenarios avoided security issues addressed in the basic profile, despite the fact that the specification of the Profile mandates composition with an OGSA Basic Security profile.

6. Author Information

Vivian Li
Fujitsu Labs of Europe

7. Contributors

We gratefully acknowledge the contributions from Rachana Ananthakrishnan, Michel Drescher, Donald Fellows, Tom Howe, Hiro Kishimoto, Shiraz Memon, Mark Morgan, Andreas Savva, Dave Snelling, Ian Foster, and Tom Maguire.

8. Intellectual Property Statement

The OGF takes no position regarding the validity or scope of any intellectual property or other rights that might be claimed to pertain to the implementation or use of the technology described in this document or the extent to which any license under such rights might or might not be available; neither does it represent that it has made any effort to identify any such rights. Copies of claims of rights made available for publication and any assurances of licenses to be made available, or the result of an attempt made to obtain a general license or permission for the use of such proprietary rights by implementers or users of this specification can be obtained from the OGF Secretariat.

The OGF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this recommendation. Please address the information to the OGF Executive Director.

9. Disclaimer

This document and the information contained herein is provided on an "As Is" basis and the OGF disclaims all warranties, express or implied, including but not limited to any warranty that the use of the information herein will not infringe any rights or any implied warranties of merchantability or fitness for a particular purpose.

10. Full Copyright Notice

Copyright (C) Open Grid Forum 2008-2009. All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the OGF or other organizations, except as needed for the purpose of developing Grid Recommendations in which case the procedures for copyrights defined in the OGF Document process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the OGF or its successors or assignees.

11. References

[OGSA-WSRFBP] I. Foster, T. Maguire, D. Snelling, OGSA WSRF Basic Profile 1.0 (OGSAWSRFBP), GFD-R.P-72 May 2006.

<http://www.ogf.org/documents/GFD.72.pdf>

[WS-Addressing] D. Box and F. Curbera (ed.) Web Services Addressing 1.0 – Core (WS-Addressing), W3C Proposed Recommendation, 21 March 2006.

<http://www.w3.org/TR/2006/PR-ws-addr-core-20060321>

[WS-ResourceProperties] S. Graham and J. Treadwell (ed.) Web Services Resource Properties 1.2 (WS-ResourceProperties), OASIS Standard, 1 April 2006.

http://docs.oasis-open.org/wsrf/wsrf-ws_resource_properties-1.2-spec-os.pdf

[WS-ResourceLifetime] L. Srinivasan and T. Banks (ed.) Web Services Resource Lifetime 1.2 (WS-ResourceLifetime), OASIS Standard, 1 April 2006.

http://docs.oasis-open.org/wsrf/wsrf-ws_resource_lifetime-1.2-spec-os.pdf

[WS-BaseFaults] S. Tuecke, L. Liu and S. Meder (ed.) Web Services Base Faults 1.2 (WS-BaseFaults), OASIS Standard. 1 April 2006.

http://docs.oasis-open.org/wsrf/wsrf-ws_base_faults-1.2-spec-os.pdf

[WS-BaseNotification] S. Graham, D. Hull and B. Murray (ed.) Web Services Base Notification 1.3 (WS-BaseNotification), OASIS Standard, 1 October, 2006.

http://docs.oasis-open.org/wsn/wsn-ws_base_notification-1.3-spec-os.pdf

[WS-Topics] S. Graham, W. Vambenepe and P. Niblett (ed.) Web Services Topics 1.3 (WS-Topics), OASIS Standard, 1 October 2006. http://docs.oasis-open.org/wsn/wsn-ws_topics-1.3-spec-os.pdf

Appendix A Interoperability Testing Specification

This appendix defines a set of scenarios that will be used in the OGSA WSRF Basic Profile (hereafter the Profile) interoperability workshop. In particular, it will focus on the following topics that the OGSA Basic Profile specification addressed, they are:

- WS-Addressing
- WS-Resource Properties
 - From the Profile
 - ResourcePropertyNames
 - FinalWSResourceInterface
 - WSResourceInterfaces
 - ResourceEndpointReference
 - From Resource Lifetime
 - CurrentTime
 - TerminationTime
- WS-Resource Properties Operations
 - GetResourceProperty
 - GetMultipleResourceProperties
 - QueryResourceProperties
- WS-Resource Lifetime
 - Destroy
 - SetTerminationTime
- WS-Notification
 - Subscription
 - Resource Property Change Notification
 - Notify
- WS-Base Fault

The scenarios are based on a Ticker service that will tick in a designated interval, this provide a simple service to test WSRF resource properties, operations, lifetime, and particularly notification easily. The creation of a ticker object is done via a factory on request.

A.1. Scope

To avoid complication this document tries to avoid security issues addressed in the basic profile, although the specification of the Profile mandates composition with an OGSA Basic Security profile.

A.2. Terminology

The keywords “MUST”, “MUST NOT”, “REQUIRED”, “SHALL”, “SHALL NOT”, “SHOULD”, “SHOULD NOT”, “RECOMMENDED”, “MAY”, and “OPTIONAL” in this document are to be interpreted as described in RFC2119.

When describing concrete XML schemas, this specification uses the notational convention of [WS-Security]. Specifically, each member of an element’s [children] or [attributes] property is described using an XPath-like notation (e.g., /x:MyHeader/x:SomeProperty/@value1). The use of {any} indicates the presence of an element wildcard (<xsd:any/>). The use of @{any} indicates the presence of an attribute wildcard (<xsd:anyAttribute/>).

A.3. Namespaces

The following namespaces are used in this document:

Prefix	Namespace
ogsa-bp	http://schemas.ogf.org/ogsa/2006/05/wsrf-bp
xsd	http://www.w3.org/2001/XMLSchema
soap	http://schemas.xmlsoap.org/soap/envelope
wsdl	http://schemas.xmlsoap.org/wsdl
wsa	http://www.w3.org/2005/08/addressing
wsrf-bf	http://docs.oasis-open.org/wsrf/bf-2
wsrf-r	http://docs.oasis-open.org/wsrf/r-2
wsrf-rp	http://docs.oasis-open.org/wsrf/rp-2
wsrf-rpw	http://docs.oasis-open.org/wsrf/rpw-2
wsrf-rl	http://docs.oasis-open.org/wsrf/rl-2
wsrf-rlw	http://docs.oasis-open.org/wsrf/rlw-2
wsnt	http://docs.oasis-open.org/wsn/b-2
wsntw	http://docs.oasis-open.org/wsn/bw-2
ticker	http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker
factory	http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker-factory


Appendix B Ticker Factory Service

In OGSA, factory operations are not standardised, Web services endpoints are obtained either from the beginning, or through other discovery mechanisms. However, to simplify the interoperability test, this document defines a complete factory service to create ticker service instances. The access to the factory service is through a published addressing URL. A factory service contains only one operation, called CreateTicker.

```
<soap:Body>
    <ticker-factory>CreateTicker
        xmlns=http://www.w3.org/2005/08/addressing
        xmlns:ticker-factory="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
            interop/ticker-factory"/>
</soap:Body>
```

and a response should contain an EndpointReference to a ticker service instance.

```
<soap:Body>
    <ticker-factory>CreateTickerResponse
        xmlns="http://www.w3.org/2005/08/addressing"
        xmlns:ticker-factory ="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
            interop/ticker-factory">
        <ticker-factory:TickerReference>
            <Address>
                http://193.122.18.162:8080/ogsabp-interop/ticker
            </Address>
            <ReferenceParameters>
                <jaxws:objectId
                    xmlns:jaxws="http://jax-ws.dev.java.net/xml/ns/"
                    xmlns:wsa="http://www.w3.org/2005/08/addressing">
                    call124a5-6d11-4160-b21b-c46709344317
                </jaxws:objectId>
            </ReferenceParameters>
            <Metadata>
                <ServiceName:ServiceName
                    xmlns:ServiceName="http://www.w3.org/2007/05/addressing/metadata"
                    xmlns:ns2="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker"
                    xmlns:ns6="http://www.w3.org/2007/05/addressing/metadata"
                    EndpointName="TickerPort"> ticker-
                factory:TickerService</ServiceName:ServiceName>
                <WSDLLocation:WSDLLocation
                    xmlns:WSDLLocation="http://usmt.fujitsu.com/nucleus/ext/addressing"
                    xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">http://193.122.18.16
                    2:8080/ogsabp-interop/ticker?wsdl</WSDLLocation:WSDLLocation>
                </Metadata>
            </ns2:TickerReference>
        </ns2:CreateTickerResponse>
</soap:Body>
```

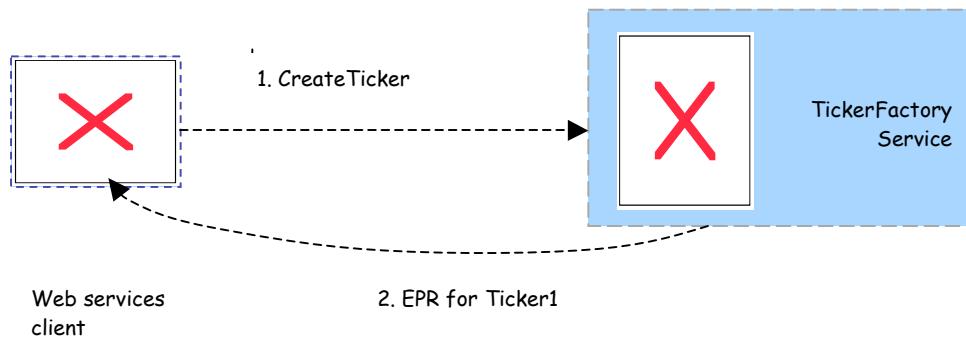

Appendix C Ticker Service

This section defines resource properties and operations of a ticker service in the interoperability test.

C. 1 . Ticker service resource properties

A ticker service has only one native resource property, the primitive long type “Ticker” property, which indicates a ticker service instance’s ticking frequency. A default value is set to 30 seconds, and should be changeable by using either WSRF UpdateResourceProperty operation or SetResourceProperties operation. However, this will not be normatively defined in this interoperability test document. The Ticker resource property looks like:


```
<xsd:element name="Ticker" type="xsd:long" />
```

Since the Ticker service conforms to the Profile, it should also contain resource properties recommended and defined by the Profile, this includes Resource lifetime properties wsrf-rlw:CurrentTime, wsrf-rlw:TerminationTime, and the four mandatory resource properties from the Profile, these are summarised in the following table:

Property Name	Type	Cardinality	Comments
Ticker	long	1	
CurrentTime	dateTime	1	
TerminationTime	dateTime	1	
ResourcePropertyNames	QNameListType	1	
FinalWSResouceInterface	QName	1	
WSResouceInterfaces	QNameListType	1	
ResourceEndpointReference	EndpointReferenceType	1	

C. 2 . Ticker service interoperability operations


All the operations that are going to be tested in this interoperability tests are as follows:

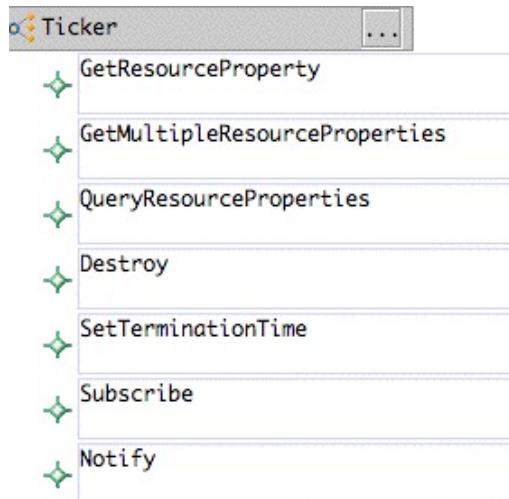

Appendix D WSRF Basic Profile interoperability test scenarios

D. 1 . Scenario A: Initial Creation of a ticker service instance

A Web service client should contact any factory endpoint published by interoperability participants by sending a CreateTicker request, a successful response should contain an EndpointReference of the Ticker service instance. In the case of not successful, the service fails silently with an empty response.

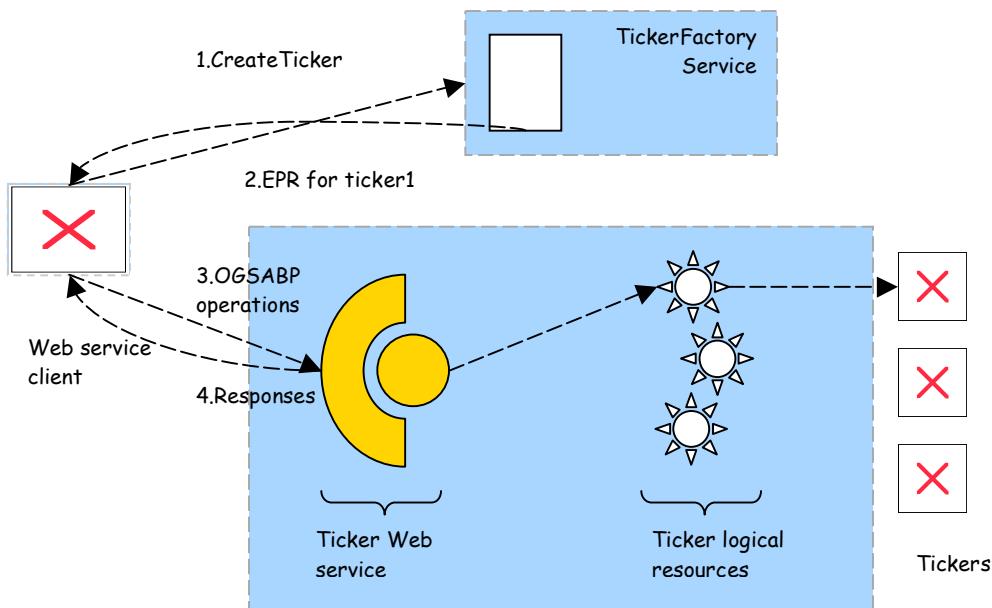

D. 2 . Scenario B: OGSA Resource Properties Tests

Ticker WS Resources are accessed using endpoint references created by the TickerFactory Web service. WSRF operations can be used to get and query the ticker's OGSA resource properties. These operations are:

- GetResourceProperty
- GetMultipleResourceProperties
- QueryResourceProperties

D. 2 . 1 .Test 1: ResourcePropertyName

A *GetResourceProperty* operation on this property looks like:

```

<soap:Body>
  <wsrf-rp:GetResourceProperty>

```

```

    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
    xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
    ogsa:ResourcePropertyNames
</wsrf-rp:GetResourceProperty>
</soap:Body>
```

and the response message should look like:

```

<soap:Body>
    <wsrf-rp:GetResourcePropertyResponse xmlns:wsrf-rp="http://docs.oasis
    -open.org/wsrf/rp- 2">
        <ogsa:ResourcePropertyNames
            xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
            xmlns:ticker="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp
                -interop/ticker"
            xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2">
                wsrf-rl:CurrentTime
                ogsa:ResourceEndpointReference
                ticker:Ticker
                ogsa:FinalWSResourceInterface
                wsrf-rl:TerminationTime
                ogsa:WSResourceInterfaces
            </ogsa:ResourcePropertyNames>
        </wsrf-rp:GetResourcePropertyResponse>
    </soap:Body>
```

A *GetMultipleResourceProperties* operation on this property looks like:

```

<soap:Body>
    <wsrf-rp:GetMultipleResourceProperties
        xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2">
        <wsrf-rp:ResourceProperty
            xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
                ogsa:ResourcePropertyNames
            </wsrf-rp:ResourceProperty>
            <wsrf-rp:ResourceProperty
                xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2">
                    wsrf-rl:CurrentTime
                </wsrf-rp:ResourceProperty>
            </wsrf-rp:GetMultipleResourceProperties>
    </soap:Body>
```

And the response:

```
<soap:Body>
  <wsrf-rp:GetMultipleResourcePropertiesResponse
    xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2"
    xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
    xmlns:ns2="http://www.w3.org/2005/08/addressing"
    xmlns:ns3="http://docs.oasis-open.org/wsn/b-2"
    xmlns:ns4="http://docs.oasis-open.org/wsrf/bf-2"
    xmlns:ns5="http://docs.oasis-open.org/wsn/t-1"
    xmlns:ns6="http://schemas.ogf.org/rm/2007/05/lifecycle"
    xmlns:ns9="http://usmt.fujitsu.com/nucleus/ext/addressing"
    xmlns:ns10="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
    xmlns:ns11="http://docs.oasis-open.org/wsrf/r-2"
    xmlns:ns12="http://www.w3.org/2007/05/addressing/metadata">
    <wsrf-rl:CurrentTime>2008-02-12T15:38:59.840Z</wsrf-rl:CurrentTime>
    <ogsa:ResourcePropertyNames
      = "http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker">
      ns10:ResourceEndpointReference
      ns6:CommissioningParameterName
      ns6:LifecycleState
      ns6:ActivationParameterName
      wsrf-rl:TerminationTime
      ns10:FinalWSResourceInterface
      wsrf-rl:CurrentTime
      ns6:ActivationParameterValues
      ns10:ResourcePropertyNames
      ns6:CommissioningParameterValues
      ns3:FixedTopicSet
      ns10:WSResourceInterfaces
      ns3:TopicExpressionDialect
      Ticker
      ns3:TopicExpression
      ns6:PreviousLifecycleState
    </ogsa:ResourcePropertyNames>
  </wsrf-rp:GetMultipleResourcePropertiesResponse>
</soap:Body>
```

A QueryResourceProperties operation on this property looks like:

```
<soap:Body>
  <wsrf-rp:QueryResourceProperties
    xmlns:rp="http://docs.oasis-open.org/wsrf/rp-2">
    <wsrf-rp:QueryExpression Dialect
      = "http://www.w3.org/TR/1999/REC-xpath-19991116">
        //*[local-name()='Ticker']
    </wsrf-rp:QueryExpression>
  </wsrf-rp:QueryResourceProperties>
</soap:Body>
```

And the response:

```
<soap:Body>
    <wsrf-rp:QueryResourcePropertiesResponse
        xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
        xmlns:unic="http://www.unicore.eu/unicore6/wsrfelite">
        0
    </wsrf-rp:QueryResourcePropertiesResponse>
</soap:Body>
```

D. 2 . 2 .Test 2: FinalWSResourceInterface

A *GetResourceProperty* operation on this property looks like:

```
<soap:Body>
    <wsrf-rp:GetResourceProperty
        xmlns:rp="http://docs.oasis-open.org/wsrf/rp-2"
        xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
        ogsa:FinalWSResourceInterface
    </wsrf-rp:GetResourceProperty>
</soap:Body>
```

and the response message should look like:

```
<soap:Body>
    <wsrf-rp:GetResourcePropertyResponse
        xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2">
        <ogsa:FinalWSResourceInterface
            xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
            xmlns:ticker="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp
                -interop/ticker">
            ticker:Ticker
        </ogsa:FinalWSResourceInterface>
    </wsrf-rp:GetResourcePropertyResponse>
</soap:Body>
```

A *GetMultipleResourceProperties* operation on this property looks like:

```
<soap:Body>
    <wsrf-rp:GetMultipleResourceProperties
        xmlns:wsrf-rp="http://ocs.oasis-open.org/wsrf/rp-2"
        xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2"
        xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
        <wsrf-rp:ResourceProperty>
            wsrf-rl:CurrentTime
        </wsrf-rp:ResourceProperty>
        <wsrf-rp:ResourceProperty>
```

```

        wsrf-rl:TerminationTime
    </wsrf-rp:ResourceProperty>
    <wsrf-rp:ResourceProperty>
        ogsa:FinalWSResourceInterface
    </wsrf-rp:ResourceProperty>
</wsrf-rp:GetMultipleResourceProperties>
</soap:Body>
```

And the response:

```

<soap:Body>
    <wsrf-rp:GetMultipleResourcePropertiesResponse
        xmlns:wsrf-rl=http://docs.oasis-open.org/wsrf/rl-2
        xmlns:wsrf-rp=http://docs.oasis-open.org/wsrf/rp-2
        xmlns:ogsa=http://schemas.ggf.org/ogsa/2006/05/wsrf-bp>
        <wsrf-rl:CurrentTime>
            2008-02-12T15:39:00.131Z
        </wsrf-rl:CurrentTime>
        <ogsa:FinalWSResourceInterface
            xmlns="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker">
            Ticker
        </ogsa:FinalWSResourceInterface>
    </wsrf-rp:GetMultipleResourcePropertiesResponse>
</soap:Body>
```

A QueryResourceProperties operation on this property looks like:

```

<soap:Body>
    <wsrf-rp:QueryResourceProperties
        xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2">
        <wsrf-rp:QueryExpression Dialect="http://www.w3.org/TR/1999/REC-
xpath-19991116">//*[local-name()='FinalWSResourceInterface']</wsrf-rp:QueryExpression>
    </wsrf-rp:QueryResourceProperties>
</soap:Body>
```

And the response:

```

<soap:Body>
    <wsrf-rp:QueryResourcePropertiesResponse
        xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2">
        <wsrf:FinalWSResourceInterface
            xmlns:wsrf="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
            xmlns:bprp1="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
interop/ticker">
            bprp1:Ticker
        </wsrf:FinalWSResourceInterface>
```

```
</wsrf-rp:QueryResourcePropertiesResponse>
</soap:Body>
```

D. 2 . 3 .Test 3: WSResourceInterfaces

A *GetResourceProperty* operation on this property looks like:

```
<soap:Body>
  <wsrf-rp:GetResourceProperty
    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
    xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
    ogsa:WSResourceInterfaces
    </wsrf-rp:GetResourceProperty>
</soap:Body>
```

and the response message should look like:

```
<soap:Body>
  <wsrf-rp:GetResourcePropertyResponse
    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2">
    <WSResourceInterfaces
      xmlns="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
      xmlns:ticker="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp
                    -interop/ticker"
      xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rpw-2"
      xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rlw-2">
      wsrf-rl:ScheduledResourceTermination
      wsrf-rp:GetResourceProperty
      ticker:Ticker
      wsrf-rp:GetResourcePropertyDocument
      wsrf-rl:ImmediateResourceTermination
      wsrf-rp:QueryResourceProperties
    </WSResourceInterfaces>
  </wsrf-rp:GetResourcePropertyResponse>
</soap:Body>
```

A *GetMultipleResourceProperties* operation on this property looks like:

```
<soap:Body>
  <wsrf-rp:GetMultipleResourceProperties
    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
    xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2"
    xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
    <wsrf-rp:ResourceProperty>
      wsrf-rl:CurrentTime
    </wsrf-rp:ResourceProperty>
  </wsrf-rp:GetMultipleResourceProperties>
</soap:Body>
```

```

        </wsrf-rp:ResourceProperty>
        <wsrf-rp:ResourceProperty>
            wsrf-rl:TerminationTime
        </wsrf-rp:ResourceProperty>
        <wsrf-rp:ResourceProperty>
            ogsa:WSResourceInterfaces
        </wsrf-rp:ResourceProperty>
    </wsrf-rp:GetMultipleResourceProperties>
</soap:Body>
```

And the response:

```

<soap:Body>
    <wsrf-rp:GetMultipleResourcePropertiesResponse
        xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2"
        xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
        xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
        <wsrf-rl:CurrentTime>2008-02-12T15:39:00.561Z</wsrf-rl:CurrentTime>
        <ogsa:WSResourceInterfaces
            xmlns="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker"
            xmlns:usmt="http://usmt.fujitsu.com/service/basicservice"
            xmlns:nt="http://docs.oasis-open.org/wsn/bw-2"
            xmlns:wsrf-lc="http://schemas.ogf.org/rm/2007/05/lifecycle"
            xmlns:wsrf-rlw="http://docs.oasis-open.org/wsrf/rlw-2"
            xmlns:wsrf-rpw="http://docs.oasis-open.org/wsrf/rpw-2"
            xmlns:wsrf-rw="http://docs.oasis-open.org/wsrf/rw-2">
            Ticker usmt:USMTBasicService
            nt:NotificationProducer
            nt:NotificationConsumer
            wsrf-lc:WSResourceLifecycle
            wsrf-rlw:ImmediateResourceTermination
            wsrf-rlw:ScheduledResourceTermination
            wsrf-rpw:GetResourceProperty
            wsrf-rpw:GetMultipleResourceProperties
            wsrf-rw:WSResource
        </ogsa:WSResourceInterfaces>
    </wsrf-rp:GetMultipleResourcePropertiesResponse>
</soap:Body>
```

A QueryResourceProperties operation on this property looks like:

```

<soap:Body>
    <wsrf-rp:QueryResourceProperties xmlns:wsrf-rp="http://docs.oasis
        open.org/wsrf/rp-2">
        <wsrf-rp:QueryExpression
            Dialect="http://www.w3.org/TR/1999/REC-xpath-19991116">
                //*[@local-name()='WSResourceInterfaces']
```

```
</wsrf-rp:QueryExpression>
</wsrf-rp:QueryResourceProperties>
</soap:Body>
```

And the response:

```
<soap:Body>
  <wsrf-rp:QueryResourcePropertiesResponse
    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2">
    <WSResourceInterfaces
      xmlns="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
      xmlns:bpri3="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
      interop/ticker"
      xmlns:bpri2="http://docs.oasis-open.org/wsrf/rpw-2"
      xmlns:bpri1="http://docs.oasis-open.org/wsrf/rlw-
      2">
      bpri1:ScheduledResourceTermination
      bpri2:GetResourceProperty
      bpri2:GetResourcePropertyDocument
      bpri3:Ticker bpri1:ImmediateResourceTermination
      bpri2:QueryResourceProperties</WSResourceInterfaces>
    </wsrf-rp:QueryResourcePropertiesResponse>
  </soap:Body>
```

D. 2 . 4 .Test 4: ResourceEndpointReference

A *GetResourceProperty* operation on this property looks like:

```
<soap:Body>
  <wsrf-rp:GetResourceProperty
    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
    xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
    ogsa:ResourceEndpointReference
  </wsrf-rp:GetResourceProperty>
</soap:Body>
```

and the response message should look like:

```
<soap:Body>
  <wsrf-rp:GetResourcePropertyResponse
    xmlns:wsa="http://www.w3.org/2005/08/addressing"
    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
    xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
    xmlns:wsa-meta="http://www.w3.org/2007/05/addressing/metadata"
    xmlns:usmt-adress="http://usmt.fujitsu.com/nucleus/ext/addressing">
    <ogsa:ResourceEndpointReference>
      <wsa:Address>
        http://193.122.18.162:8080/ogsabp-interop/ticker
    </ogsa:ResourceEndpointReference>
  </wsrf-rp:GetResourcePropertyResponse>
</soap:Body>
```

```

</wsa:Address>
<wsa:ReferenceParameters>
    <jaxws:objectId
        xmlns:jaxws="http://jax-ws.dev.java.net/xml/ns/"
        xmlns=http://www.w3.org/2005/08/addressing
        xmlns:wsa="http://www.w3.org/2005/08/addressing">
        call124a5-6d11-4160-b21b-c46709344317
    </jaxws:objectId>
</wsa:ReferenceParameters>
<wsa:Metadata>
    <wsa-meta:ServiceName xmlns="">
xmlns:ticker=http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker
xmlns:wsa-meta="http://www.w3.org/2007/05/addressing/metadata"
EndpointName="TickerPort">
        ticker:TickerService
    </wsa-meta:ServiceName>
    <usmt-adress:WSDLlocation
        xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">
        http://193.122.18.162:8080/ogsabp-interop/ticker?wsdl
    </usmt-adress:WSDLlocation>
    </wsa-meta:Metadata>
</wsa:ResourceEndpointReference>
</wsrf-rp:GetResourcePropertyResponse>
</soap:Body>
```

A *GetMultipleResourceProperties* operation on this property looks like:

```

<soap:Body>
    <wsrf-rp:GetMultipleResourceProperties
        xmlns:wsrf-rp="http://ocs.oasis-open.org/wsrf/rp-2"
        xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2"
        xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp">
        <ogsa:ResourceProperty>wsrf-rl:CurrentTime</ogsa:ResourceProperty>
        <ogsa:ResourceProperty>
            ogsa:ResourceEndpointReference
        </ogsa:ResourceProperty>
    </wsrf-rp:GetMultipleResourceProperties>
</soap:Body>
```

And the response:

```

<soap:Body>
    <wsrf-rp:GetMultipleResourcePropertiesResponse
        xmlns:wsa="http://www.w3.org/2005/08/addressing"
        xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2"
        xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
        xmlns:ogsa="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
        xmlns:wsa-meta="http://www.w3.org/2007/05/addressing/metadata"
```

```

xmlns:usmt-adress="http://usmt.fujitsu.com/nucleus/ext/addressing">
<wsrf-rl:CurrentTime>
    2008-02-12T15:39:00.349Z
</wsrf-rl:CurrentTime>
<ogsa:ResourceEndpointReference>
    <wsa:Address>
        http://193.122.18.162:8080/ogsabp-interop/ticker
    </wsa:Address>
    <wsa:ReferenceParameters>
        <jaxws:objectId
            xmlns:jaxws="http://jax-ws.dev.java.net/xml/ns/"
            xmlns=http://www.w3.org/2005/08/addressing
            xmlns:wsa="http://www.w3.org/2005/08/addressing">
            call124a5-6d11-4160-b21b-c46709344317
        </jaxws:objectId>
    </wsa:ReferenceParameters>
    <wsa:Metadata>
        <wsa-meta:ServiceName xmlns="">
xmlns:ticker=http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker
xmlns:wsa-meta="http://www.w3.org/2007/05/addressing/metadata"
EndpointName="TickerPort">
            ticker:TickerService
        </wsa-meta:ServiceName>
        <usmt-adress:WSDLLocation
            xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">
            http://193.122.18.162:8080/ogsabp-interop/ticker?wsdl
        </usmt-adress:WSDLLocation>
    </wsa-meta:Metadata>
    </wsa:ResourceEndpointReference>
</wsrf-rp:GetMultipleResourcePropertiesResponse>
</soap:Body>

```

A QueryResourceProperties operation on this property looks like:

```

<soap:Body>
    <wsrf-rp:QueryResourceProperties xmlns:wsrf-rp="http://docs.oasis
open.org/wsrf/rp-2">
        <wsrf-rp:QueryExpression
            Dialect="http://www.w3.org/TR/1999/REC-xpath-19991116">
                //*[@local-name()='ResourceEndpointReference']
            </wsrf-rp:QueryExpression>
        </wsrf-rp:QueryResourceProperties>
    </soap:Body>

```

And the response:

```
<soap:Body>
  <wsrf-rp:QueryResourcePropertiesResponse
    xmlns:wsa="http://www.w3.org/2005/08/addressing"
    xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
    xmlns:wsa-meta="http://www.w3.org/2007/05/addressing/metadata"
    xmlns:usmt-adress="http://usmt.fujitsu.com/nucleus/ext/addressing">
    <ogsa:ResourceEndpointReference>
      <wsa:Address>
        http://193.122.18.162:8080/ogsabp-interop/ticker
      </wsa:Address>
      <wsa:ReferenceParameters>
        <jaxws:objectId
          xmlns:jaxws="http://jax-ws.dev.java.net/xml/ns/"
          xmlns=http://www.w3.org/2005/08/addressing
          xmlns:wsa="http://www.w3.org/2005/08/addressing">
          call124a5-6d11-4160-b21b-c46709344317
        </jaxws:objectId>
      </wsa:ReferenceParameters>
      <wsa:Metadata>
        <wsa-meta:ServiceName xmlns="">
      xmlns:ticker=http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker
      xmlns:wsa-meta="http://www.w3.org/2007/05/addressing/metadata"
      EndpointName="TickerPort">
          ticker:TickerService
        </wsa-meta:ServiceName>
        <usmt-adress:WSDLLocation
          xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">
          http://193.122.18.162:8080/ogsabp-interop/ticker?wsdl
        </usmt-adress:WSDLLocation>
      </wsa-meta:Metadata>
    </wsa:ResourceEndpointReference>
  </wsrf-rp:QueryResourcePropertiesResponse>
</soap:Body>
```

D. 3 . Scenario C: Resource Lifetime Operations and Base Fault

A Ticker service MUST also support Resource lifetime operations.

D. 3 . 1 .Test 5: Immediate Resource Termination and Base Fault

After a Ticker resource has been created from Scenario A, it can be terminated via the Destroy operation from the Resource Lifetime:

```
<soap:Body>
  <wsrf-rl:Destroy
```

```

    xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2" />
</soap:Body>
```

A successful Destroy response should look like:

```

<soap:Body>
    <wsrf-rl:DestroyResponse
        xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2" />
</soap:Body>
```

A second Destroy request should result in a “ResourceUnknownFault” in response. This fault is an extension to BaseFault.

D. 3 . 2 .Test 6: Scheduled Resource Termination and Base Fault

An alternative way to terminate a Ticker resource is through the SetTerminationTime operation. By invoking this operation, the Lifetime resource property TerminationTime is set to the value as required in the SetTerminationTime request message, and the Ticker resource should be destructed in a future time specified by the TerminationTime resource property, to simplify the test, 1-2 minutes into the future is recommended. The request message should look like:

```

<soap:Body>
    <wsrf-rl:SetTerminationTime
        xmlns:rl="http://docs.oasis-open.org/wsrf/rl-2">
        <wsrf-rl:RequestedTerminationTime>
            2008-11- 29T00:06:01.211Z
        </wsrf-rl:RequestedTerminationTime>
    </wsrf-rl:SetTerminationTime>
</soap:Body>
```

and a successful response should look like:

```

<soap:Body>
    <wsrf-rl:SetTerminationTimeResponse
        xmlns:wsrf-rl="http://docs.oasis-open.org/wsrf/rl-2">
        <wsrf-rl>NewTerminationTime>
            2008-11-29T00:06:01.211Z
        </wsrf-rl>NewTerminationTime>
        <wsrf-rl>CurrentTime>
            2008-11-29T00:06:01.211Z
        </wsrf-rl>CurrentTime>
    </wsrf-rl:SetTerminationTimeResponse>
</soap:Body>
```

To verify if the Ticker service instance has been terminated at the required time, any operations from the above scenarios can be called again, and a “ResourceUnknownFault” should be expected in response if the SetTerminationTime operation is successful.

D. 4 . Scenario D: Base Notification

To test ResourcePropertyChangeNotification, an implementation should implement Notification Producer to produce the notification messages, and Notification Consumer to get notified by other servers' notifications. In this test, a client should invoke a “Subscribe” operation first on the Ticker property to the remote site, since this is the only property whose value changes in certain frequency.

D. 4 . 1 .Test 8: Subscribe

an example of Subscribe request on the Ticker resource property should look like this:

```
<soap:Body>
    <wsn:Subscribe xmlns:wsrf-rp="http://docs.oasis-open.org/wsrf/rp-2"
        xmlns:wsa="http://www.w3.org/2005/08/addressing"
        xmlns:wsn="http://docs.oasis-open.org/wsn/b-2"
        xmlns:usmt-adress="http://usmt.fujitsu.com/nucleus/ext/addressing"
        xmlns:wsa-meta=http://www.w3.org/2007/05/addressing/metadata>
        <wsn:ConsumerReference>
            <wsa:Address>
                http://86.0.247.126:58080/SimpleNotificationConsumer
            </wsa:Address>
        <wsa:ReferenceParameters/>
        <wsa:Metadata>
            <wsa-meta:ServiceName xmlns="">
                xmlns:wsrf-rp="http://schemas.ogf.org/ogsa/2007/10/bp_interop"
                xmlns:ns17="http://www.w3.org/2007/05/addressing/metadata"
                EndpointName="OGSABPNotificationConsumerPort">
                    wsrf-rp:OGSABPNotificationConsumerService
                </wsa-meta:ServiceName>
                <usmt-adress:WSDLLocation
                    xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">
                    http://86.0.247.126:58080/SimpleNotificationConsumer?wsdl
                </usmt-adress:WSDLLocation>
            </wsa:Metadata>
        </wsn:ConsumerReference>
        <wsn:Filter>
            <wsn:TopicExpression Dialect="http://docs.oasis
                -open.org/wsn/t-1/TopicExpression/Simple">
                {http://schemas.ogf.org/ogsa/2007/12/wsrf-bp
                -interop/ticker}Ticker
            </wsn:TopicExpression>
        </wsn:Filter>
        <wsn:InitialTerminationTime>
            PT15M0.000S
        </wsn:InitialTerminationTime>
    </wsn:Subscribe>

```

```

</wsn:InitialTerminationTime>
</wsn:Subscribe>
</soap:Body>
```

and the response should look as follows, if the request is successful:

```

<soap:Body>
  <wsn:SubscribeResponse xmlns="http://www.w3.org/2005/08/addressing"
    xmlns:wsn="http://docs.oasis-open.org/wsn/b-2"
    xmlns:usmt-adress="http://usmt.fujitsu.com/nucleus/ext/addressing"
    xmlns:ns9="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
    xmlns:ns10="http://docs.oasis-open.org/wsrf/r-2"
    xmlns:wsa-meta="http://www.w3.org/2007/05/addressing/metadata">
    <wsn:SubscriptionReference>
      <Address>
        http://193.122.18.162:8080/ogsabpinterop/subscription
      </Address>
      <ReferenceParameters>
        <jaxws:objectId
          xmlns:jaxws="http://jax-ws.dev.java.net/xml/ns/"
          xmlns:wsa="http://www.w3.org/2005/08/addressing">
          a5bedfd2-b487-46dd-81bc-6f5df68d1ef4
        </jaxws:objectId>
      </ReferenceParameters>
      <Metadata>
        <wsa-meta:ServiceName xmlns="">
          xmlns:wsn=http://docs.oasis-open.org/wsn/bw-2
          EndpointName="SubscriptionManagerPort">
          wsn:SubscriptionManagerService
        </wsa-meta:ServiceName>
        <usmt-adress:WSDLLocation
          xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">
          http://193.122.18.162:8080/ogsabp-interop/subscription?wsdl
        </usmt-adress:WSDLLocation>
      </Metadata>
    </wsn:SubscriptionReference>
    <wsn:TerminationTime>
      2008-02-12T15:54:05.740Z
    </wsn:TerminationTime>
  </wsn:SubscribeResponse>
</soap:Body>
```

D. 4 . 2 . Scenario D2: Notify

If a subscription is successful, the Notification Producer should send out a Notify message to the client whenever the value of this Ticker resource property changes. A sample Notify message should look like:

```
<soap:Body>
    <ns6:Notify
        xmlns:ns2="http://docs.oasis-open.org/wsn/t-1"
        xmlns:ns3="http://docs.oasis-open.org/wsrf/rp-2"
        xmlns:ns4="http://docs.oasis-open.org/wsrf/bf-2"
        xmlns:ns5="http://www.w3.org/2005/08/addressing"
        xmlns:ns6="http://docs.oasis-open.org/wsn/b-2"
        xmlns:ns7="http://usmt.fujitsu.com/nucleus/service/factory"
        xmlns:ns8="http://docs.oasis-open.org/wsrf/rl-2"
        xmlns:ns9="http://usmt.fujitsu.com/nucleus/ext/addressing"
        xmlns:ns10="http://schemas.ogf.org/rm/2007/05/lifecycle"
        xmlns:ns12="http://usmt.fujitsu.com/nucleus/service/registry"
        xmlns:ns13="http://www.w3.org/2007/05/addressing/metadata"
        xmlns:ns14="http://schemas.ggf.org/ogsa/2006/05/wsrf-bp"
        xmlns:ns15="http://docs.oasis-open.org/wsrf/r-2">
        <ns6:NotificationMessage>
            <ns6:SubscriptionReference>
                <ns5:Address>
                    http://86.0.247.126:8080/ogsabp-interop/subscription
                </ns5:Address>
                <ns5:ReferenceParameters>
                    <jaxws:objectId
                        xmlns:jaxws="http://jax-ws.dev.java.net/xml/ns/"
                        xmlns="http://www.w3.org/2005/08/addressing"
                        xmlns:wsa="http://www.w3.org/2005/08/addressing">
                        23521533-5972-49c4-b084-68392323179a
                    </jaxws:objectId>
                </ns5:ReferenceParameters>
                <ns5:Metadata>
                    <ns13:ServiceName xmlns="">
                        xmlns:ns2="http://docs.oasis-open.org/wsn/bw-2"
                        xmlns:ns18="http://www.w3.org/2007/05/addressing/metadata"
                        EndpointName="SubscriptionManagerPort">
                            ns2:SubscriptionManagerService
                        </ns13:ServiceName>
                        <ns9:WSDLLocation
                            xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">
                                http://86.0.247.126:8080/ogsabp-
                                    interop/subscription?wsdl
                            </ns9:WSDLLocation>
                        </ns5:Metadata>
                    </ns6:SubscriptionReference>
                    <ns6:Topic Dialect="http://docs.oasis-open.org/wsn/t-
```

```

    1/TopicExpression/Simple">
{http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker}Ticker
    </ns6:Topic>
    <ns6:ProducerReference>
        <ns5:Address>
            http://86.0.247.126:8080/ogsabp-interop/ticker
        </ns5:Address>
        <ns5:ReferenceParameters>
            <jaxws:objectId
                xmlns:jaxws="http://jax-ws.dev.java.net/xml/ns/"
                xmlns="http://www.w3.org/2005/08/addressing"
                xmlns:wsa="http://www.w3.org/2005/08/addressing">
                55f37800-aff8-4d25-a26c-4af05300ef40
            </jaxws:objectId>
        </ns5:ReferenceParameters>
        <ns5:Metadata>
            <ns13:ServiceName xmlns="">
                xmlns:ns2="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker"
                xmlns:ns18="http://www.w3.org/2007/05/addressing/metadata"
                EndpointName="TickerPort">ns2:TickerService
                    </ns13:ServiceName>
                    <ns9:WSDLLocation
                        xmlns="http://usmt.fujitsu.com/nucleus/ext/addressing">
                            http://86.0.247.126:8080/ogsabp-interop/ticker?wsdl
                    </ns9:WSDLLocation>
                </ns5:Metadata>
                </ns6:ProducerReference>
                <ns6:Message>
                    <ns3:ResourcePropertyValueChangeNotification>
                        <ns3>NewValues>
                            <ns16:Ticker
                                xmlns:ns16="http://schemas.ogf.org/ogsa/2007/12
                                /wsrf-bp-interop/ticker">3
                            </ns16:Ticker>
                        </ns3>NewValues>
                    </ns3:ResourcePropertyValueChangeNotification>
                </ns6:Message>
                </ns6:NotificationMessage>
            </ns6:Notify>
        </soap:Body>

```

Appendix E Normative Factory Service Schema

This Appendix normatively defines the Ticker factory interface, any OGSA Basic Profile implementation must support either directly or indirectly:

```
<?xml version="1.0" encoding="utf-8"?>
<!--
    The OGF takes no position regarding the validity or scope of any
    intellectual property or other rights that might be claimed to pertain to
    the implementation or use of the technology described in this document or
    the extent to which any license under such rights might or might not be
    available; neither does it represent that it has made any effort to
    identify any such rights. Copies of claims of rights made available for
    publication and any assurances of licenses to be made available, or the
    result of an attempt made to obtain a general license or permission for the
    use of such proprietary rights by implementers or users of this
    specification can be obtained from the OGF Secretariat.
-->
```

The OGF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this recommendation. Please address the information to the OGF Executive Director.

Copyright (C) Open Grid Forum (2007) All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the OGF or other organizations, except as needed for the purpose of developing Grid Recommendations in which case the procedures for copyrights defined in the OGF Document process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the OGF or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE GLOBAL GRID FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."

-->

```
<?xml version="1.0" encoding="UTF-8"?>
```

```
<xsd:schema xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://schemas.ogf.org/ogsa/2007/12/
    wsrf-bp-interop/ticker-factory"
  xmlns:wsa="http://www.w3.org/2005/08/addressing"
  elementFormDefault="qualified"
  attributeFormDefault="unqualified">

  <xsd:import namespace="http://www.w3.org/2005/08/addressing"
    schemaLocation="http://www.w3.org/2005/08/addressing/ws-addr.xsd"/>

  <!--
    message used to create a Ticker WS-Resource
  -->
  <xsd:element name="CreateTicker">
    <xsd:complexType/>
  </xsd:element>

  <!--
    the response, simply contains an EPR to a new Ticker resource
  -->
  <xsd:element name="CreateTickerResponse">
    <xsd:complexType>
      <xsd:sequence>
        <xsd:element name="TickerReference"
          type="wsa:EndpointReferenceType" />
      </xsd:sequence>
    </xsd:complexType>
  </xsd:element>

</xsd:schema>
```

Note: The node “//wsdl:definitions/wsdl:service/wsdl:port/soap:address@location” MAY be altered to suit the needs of concrete interoperability tests without violating the normative requirements of this document.

Appendix F Normative Factory Service WSDL

This section normatively defines the transport binding any Random Access ByteIO implementation MUST support to participate in Interoperability tests. This does not restrict the implementation by no means to support other transport bindings.

```
<?xml version="1.0" encoding="utf-8"?>
<!--
    The OGF takes no position regarding the validity or scope of any
    intellectual property or other rights that might be claimed to pertain to
    the implementation or use of the technology described in this document or
    the extent to which any license under such rights might or might not be
    available; neither does it represent that it has made any effort to
    identify any such rights. Copies of claims of rights made available for
    publication and any assurances of licenses to be made available, or the
    result of an attempt made to obtain a general license or permission for the
    use of such proprietary rights by implementers or users of this
    specification can be obtained from the OGF Secretariat.
-->
```

The OGF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this recommendation. Please address the information to the OGF Executive Director.

Copyright (C) Open Grid Forum (2008). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the OGF or other organizations, except as needed for the purpose of developing Grid Recommendations in which case the procedures for copyrights defined in the OGF Document process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the OGF or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE GLOBAL GRID FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."

-->

```

<wsdl:definitions
    targetNamespace="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
        interop/ticker-factory"
    xmlns:factory="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
        -interop/tickerfactory"
    xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
    xmlns:xsd="http://www.w3.org/2001/XMLSchema"
    xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/">

    <wsdl:types>
        <xsd:schema targetNamespace="http://schemas.ogf.org/ogsa/2007/12/
            wsrf-bp-interop/ticker-factory" >
            <xsd:include schemaLocation="wsrfbp-interop-factory.xsd"/>
        </xsd:schema>
    </wsdl:types>

    <wsdl:message name="CreateTickerRequest">
        <wsdl:part name="CreateTicker"
            element="factory:CreateTicker" />
    </wsdl:message>

    <wsdl:message name="CreateTickerResponse">
        <wsdl:part name="CreateTickerResponse"
            element="factory:CreateTickerResponse" />
    </wsdl:message>

    <wsdl:portType name="TickerFactory">
        <wsdl:operation name="CreateTicker">
            <wsdl:input name="CreateTickerRequest"
                message="factory:CreateTickerRequest" />
            <wsdl:output name="CreateTickerResponse"
                message="factory:CreateTickerResponse" />
        </wsdl:operation>
    </wsdl:portType>

    <wsdl:binding name="TickerFactoryHttpBinding"
        type="factory:TickerFactory">
        <soap:binding style="document"
            transport="http://schemas.xmlsoap.org/soap/http"/>
        <wsdl:operation name="CreateTicker">
            <soap:operation
                soapAction="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
                    interop/ticker-factory/CreateTickerRequest" />
            <wsdl:input name="CreateTickerRequest">
                <soap:body use="literal" />
            </wsdl:input>
            <wsdl:output name="CreateTickerResponse">
                <soap:body use="literal" />
            </wsdl:output>
        </wsdl:operation>
    </wsdl:binding>

```

```
</wsdl:operation>
</wsdl:binding>

<wsdl:service name="TickerFactoryService">
    <wsdl:port name="TickerFactory"
        binding="factory:TickerFactoryHttpBinding">
        <soap:address
            location="http://localhost:8080/services/wsrf-bp-
                interop/TickerFactoryService"/>
    </wsdl:port>
</wsdl:service>

</wsdl:definitions>
```

Note: The node “//wsdl:definitions/wsdl:service/wsdl:port/soap:address@location” MAY be altered to suit the needs of concrete interoperability tests without violating the normative requirements of this document.

Appendix G Normative Ticker Service Schema

This section normatively defines the resource properties of the Ticker service, implementations MUST support to participate in Interoperability tests.

```
<?xml version="1.0" encoding="utf-8"?>
<!--
The OGF takes no position regarding the validity or scope of any
intellectual property or other rights that might be claimed to pertain to
the implementation or use of the technology described in this document or
the extent to which any license under such rights might or might not be
available; neither does it represent that it has made any effort to
identify any such rights. Copies of claims of rights made available for
publication and any assurances of licenses to be made available, or the
result of an attempt made to obtain a general license or permission for the
use of such proprietary rights by implementers or users of this
specification can be obtained from the OGF Secretariat.
```

The OGF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this recommendation. Please address the information to the OGF Executive Director.

Copyright (C) Open Grid Forum (2008). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the OGF or other organizations, except as needed for the purpose of developing Grid Recommendations in which case the procedures for copyrights defined in the OGF Document process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the OGF or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE GLOBAL GRID FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."

-->

```
<xsd:schema
  xmlns:xsd="http://www.w3.org/2001/XMLSchema"
  targetNamespace="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
    interop/ticker"
  elementFormDefault="qualified" attributeFormDefault="unqualified">

  <!-- Ticker Resource property -->
  <xsd:element name="Ticker" type="xsd:long" />

</xsd:schema>
```

Note: The node “//wsdl:definitions/wsdl:service/wsdl:port/soap:address@location” MAY be altered to suit the needs of concrete interoperability tests without violating the normative requirements of this document.

Appendix H Normative Ticker Service WSDL

This section normatively defines the resource properties of the Ticker service, implementations MUST support to participate in Interoperability tests.

```
<?xml version="1.0" encoding="utf-8"?>
<!--
The OGF takes no position regarding the validity or scope of any
intellectual property or other rights that might be claimed to pertain to
the implementation or use of the technology described in this document or
the extent to which any license under such rights might or might not be
available; neither does it represent that it has made any effort to
identify any such rights. Copies of claims of rights made available for
publication and any assurances of licenses to be made available, or the
result of an attempt made to obtain a general license or permission for the
use of such proprietary rights by implementers or users of this
specification can be obtained from the OGF Secretariat.
-->
```

The OGF invites any interested party to bring to its attention any copyrights, patents or patent applications, or other proprietary rights which may cover technology that may be required to practice this recommendation. Please address the information to the OGF Executive Director.

Copyright (C) Open Grid Forum (2008). All Rights Reserved.

This document and translations of it may be copied and furnished to others, and derivative works that comment on or otherwise explain it or assist in its implementation may be prepared, copied, published and distributed, in whole or in part, without restriction of any kind, provided that the above copyright notice and this paragraph are included on all such copies and derivative works. However, this document itself may not be modified in any way, such as by removing the copyright notice or references to the OGF or other organizations, except as needed for the purpose of developing Grid Recommendations in which case the procedures for copyrights defined in the OGF Document process must be followed, or as required to translate it into languages other than English.

The limited permissions granted above are perpetual and will not be revoked by the OGF or its successors or assigns.

This document and the information contained herein is provided on an "AS IS" basis and THE GLOBAL GRID FORUM DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY THAT THE USE OF THE INFORMATION HEREIN WILL NOT INFRINGE ANY RIGHTS OR ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE."

```
-->
<?xml version="1.0" encoding="UTF-8"?>
<wsdl:definitions
```

```
targetNamespace="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
    interop/ticker"
xmlns:ticker="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-interop/ticker"
xmlns:wsdl="http://schemas.xmlsoap.org/wsdl/"
xmlns:xsd="http://www.w3.org/2001/XMLSchema"
xmlns:soap="http://schemas.xmlsoap.org/wsdl/soap/" >

<wsdl:types>
    <xsd:schema
        targetNamespace="http://schemas.ogf.org/ogsa/2007/12/wsrf-bp-
            interop/ticker"
        elementFormDefault="qualified">
        <xsd:include schemaLocation="wsrfbp-interop-ticker.xsd"/>
    </xsd:schema>
</wsdl:types>

<wsdl:portType name="Ticker" />

<wsdl:binding name="TickerHttpBinding" type="ticker:Ticker">
    <soap:binding style="document"
        transport="http://schemas.xmlsoap.org/soap/http"/>
</wsdl:binding>

<wsdl:service name="TickerService">
    <wsdl:port name="Ticker" binding="ticker:TickerHttpBinding">
        <soap:address location="http://localhost:8080/services/wsrf-bp-
            interop/TickerService"/>
    </wsdl:port>
</wsdl:service>

</wsdl:definitions>
```

Note: The node “//wsdl:definitions/wsdl:service/wsdl:port/soap:address@location” MAY be altered to suit the needs of concrete interoperability tests without violating the normative requirements of this document.